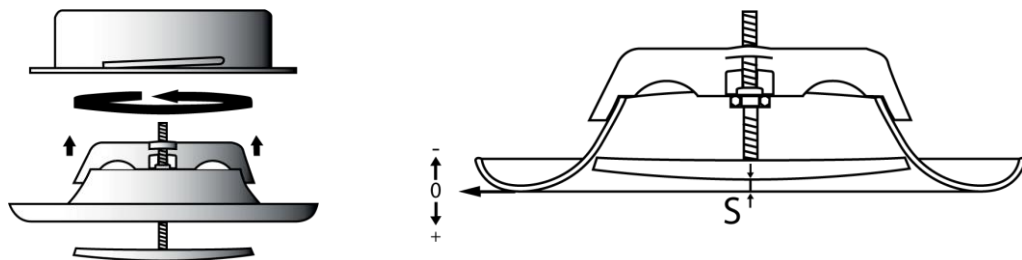
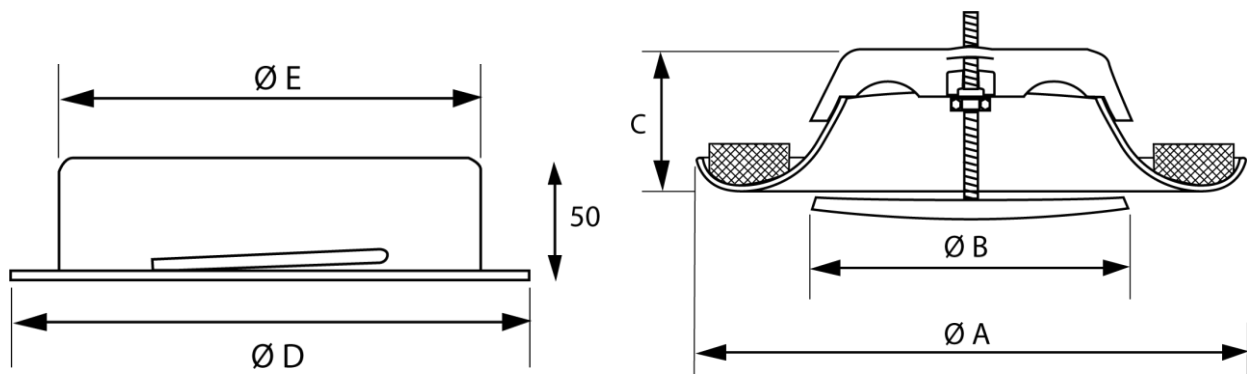


Descrizione

- Valvola di acciaio
- Interno regolabile
- Telaio di montaggio in acciaio zincato 50 mm
- Colori disponibili standard : Bianco RAL 9016 (Lucido)
- Diametri disponibili: 80-250 mm


Specifiche tecniche


	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
E-SVF 80	116	60	38	105	79
E-SVF 100	140	76	38	125	99
E-SVF 125	166	100	45	150	124
E-SVF 150	203	120	50	175	149
E-SVF 160	210	130	50	186	159
E-SVF 200	250	160	56	225	199
E-SVF 250	305	215	75	275	248

Tolleranza : +/- 3 mm eccetto diam E: Tolleranza +/- 1 mm

Attenuazione Sonora e portata

In funzione dell'apertura S

Diametro	Portata (m3/h)	Portata (l/s)	Apertura «S» (mm)	Delta Pt (Pa)	dBA
DIA 80 MM	40	11	3	35	22
			0	80	31
	60	17	9	40	30
			6	55	32
			3	100	38
DIA 100 MM	80	22.2	8	35	25
			6	55	30
			4	85	34
	100	27.8	10	58	33
			8	72	36
	120	33.3	10	68	36
DIA 125 MM	100	27.8	6	35	23
			3	50	26
			0	90	34
	140	39	15	28	25
			12	34	27
			9	45	28
			6	65	33
			3	100	36
	180	50	15	45	32
			12	50	33
			9	70	35
6			100	36	
DIA 160 MM	160	41	10	25	20
			5	42	23
			2	70	30
			0	90	35
	200	56	10	40	24
			5	68	30
			2	95	35
	250	69	15	38	26
			10	59	30
			5	95	36
DIA 200 MM	300	83	20	25	25
			15	35	27
			12	50	30
			9	68	32
			6	100	35
	350	97	20	35	30
			15	55	33
			12	70	35
	400	111	20	50	34
			15	65	36